


Bio-Logic™

Pure Water Pack

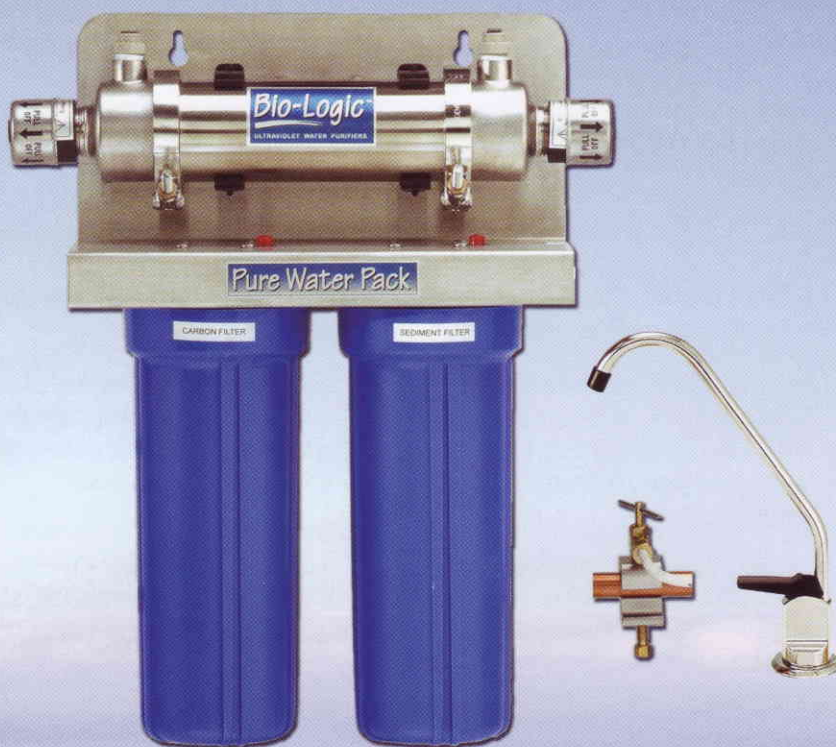

The **Bio-Logic™** Pure Water Pack combines an ultraviolet water purification unit with a dual cartridge filter system for great tasting drinking water. This all-inclusive system installs under the sink to provide 6 litres per minute of great tasting cold drinking water.

The **Bio-Logic™** Ultraviolet Water Purifier utilizes a germicidal ultraviolet lamp that produces short wave radiation lethal to bacteria, viruses and other microorganisms present in water.

Economical and safe, the **Bio-Logic™** Ultraviolet Water Purifier offers rapid water treatment without the use of heat or dangerous chemicals - often for the lowest cost available.

SPECIAL FEATURES

- **Construction** - Bio-Logic chamber is constructed of type 316 stainless steel and is electropolished and passivated for an attractive finish and dependable service.
- **Quick Lamp Change** - Exclusive Easy-Off™ Retainer Cap enables effortless lamp replacement without shut down of water pressure or drainage of tank. No tools required.
- **Dual Heads** - Constructed of type 316 stainless steel, heads may be removed and rotated and individually oriented for versatility during installation.
- **Fused Quartz Sleeve** - Insures optimum lamp output at normal potable water temperature.
- **Dual Filter Housing** - Sturdy, 5 micron sediment filter cartridge removes dirt, rust, scale, silt, sand and other water suspended particles while the 5 micron carbon filter removes chlorine, THM's, pesticides and other related volatile organic hydrocarbons.
- **Installation Kit** - Includes everything necessary to hook up entire system - tubing, saddle valve (saddle valve fits feed pipes between 3/8" to 1/2") and long reach faucet.
- **Mounting Bracket** - Stainless steel bracket with all system components factory installed. Unit is ready for hook up under the sink as soon as it's removed from carton.

UVP

ultra violet products
(aust) Pty Ltd



15 MARLOW RD, KESWICK, SOUTH AUST 5035
Telephone: (08) 8351 2822 Fax: (08) 8351 2811
Freecall: 1800 08 18 80
uvproduct@chariot.net.au

ATLANTIC  **ULTRAVIOLET**
CORPORATION

www.uvp.com.au

APPLICATIONS

The **Bio-Logic™** Pure Water Pack is installed at the point of use (under the sink) on the cold water line. The system is designed to mount on a vertical surface, a secure wall or a cabinet wall, using the mounting bracket provided.



DISTRIBUTED BY:

ADVANTAGES

Effective

Virtually all microorganisms are susceptible to Bio-Logic™ disinfection.

Efficient

Water is passed through a sediment filter and a carbon filter before the ultraviolet disinfection process.

Economical

Hundreds of litres can be purified for each cent of operating cost.

Safe

No danger of overdosing, no addition of dangerous chemicals.

Fast

Water is ready for use as soon as it leaves the purifier - no further contact time required.

Easy

Simple installation and maintenance. Compact unit requires minimum space.

Automatic

Continuous or intermittent disinfection without special attention or measurement.

Chemical Free

No chlorine taste or corrosion problems.

PRINCIPLE OF OPERATION

The **Bio-Logic™** Pure Water Pack has been designed to provide adequate filtering and germicidal ultraviolet dosage.

1. Water enters the sediment filter and traps the particulates, rust, scale and residue that affect the taste and appearance of water supply.
2. Water continues into the carbon filter and reduces chlorine, unpleasant tastes, odors and other organic chemicals and turbidity.
3. Filtered water enters the ultraviolet purifier and flows into the annular space between the quartz sleeve and the chamber wall.
4. Suspended microorganisms are exposed to the ultraviolet rays emitted by the germicidal lamp.
5. Water leaving the purifier is ready for use, no further contact time is required.

SPECIFICATIONS

BIO - 1.5FP

Flow Rate	6 Litres per minute	
Voltage	220v 50/60Hz	12v DC
Current	.125 amps	1.27amps
Unit Dimensions	375mm(L) x 140mm(W) x 438mm(H)	
Shipping Weight	8.1 kg	Inlet/outlet 3/8"
Lamp Model Number	GPH287T5L/4	
Rated Water Pressure	Maximum 125 PSI	

MAINTENANCE

- Ordinary maintenance consists of the cleaning of the quartz sleeve in the water purifier when conditions warrant
- Lamp replacement is recommended every 8,500 hours of operation (approximately 12 months of continuous service)
- Typical filter cartridge replacement is recommended every 12 months

ATLANTIC  **ULTRAVIOLET**
CORPORATION

375 Marcus Boulevard • Hauppauge, NY 11788

The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.